

Product data sheet: B NLC D OF LI Sensor for HubSense®

Bluetooth NLC sensor
For light harvesting and presence detection
D4I standard

Product family benefits

DiiA D4I certified incl.parts -351
Design freedom due to compact size
Easy to integrate in luminaire
Minimize internal wiring in combination with DEXAL drivers

Areas of application

Open offices
Individual offices
Conference rooms
Classrooms
Storage and break areas
Stairways
Toilets

Benefits

Daylight and Occupancy Sensor D4I Module
Bluetooth NLC
Control of D4I drivers or DALI drivers
Works with Hubsense
Works with OSRAM DEXAL


Approval marks

CE, Bluetooth, D4I, SRRC, UL

Housing material: plastic

Product Features

- Sensor for luminaire integration based on Bluetooth NLC
- D4I controlled
- Stand by power consumption <150mW
- 50000 h lifetime at $t_c \text{ max} = 60^\circ\text{C}$
- Installation height up to 5m
- Detection angle (PIR) +/- 65°
- Wide detection range up to 8m
- Shield accessory
- 5 years guarantee
- UL certified







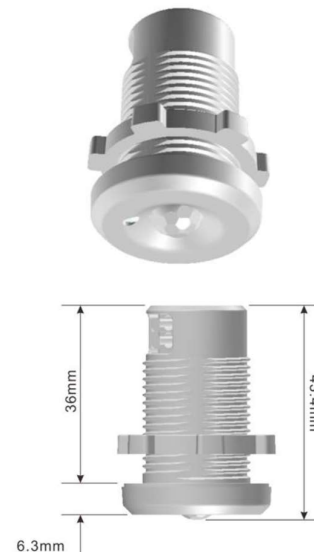


Electrical Specifications

	Item	Value	Unit	Remarks	
INPUT/ OUTPUT	Rated voltage	12 -22.5	Vdc	According to D4I standard	
	Average input current	10	mA		
	Peak input current	30	mA	@12V / 250 mA max as per DALI standard	
	Power Consumption	<150	mW		
	Radio frequency	2.4	GHz		
	Max Tx Power	+8	dBm	4.884 mW	
	Wireless protocol			Bluetooth NLC provided by SILVAIR	
CAPABILITIES	Range	20	m	Line of sight	
	Control	D4I			
	Number of connected drivers	4		D4I LED drivers	
	Type of sensor			PIR and light sensor	
	Detection angle (light sensor)	20°		50% lux detection	
	Mounting heights	5	m	Maximum	
	Installations			Luminaire integration and false ceilings	
	PIR detection range	6 8	m m	@3m height 20- 35 °C; <75% relative humidity @5m height	
	Detection angle (PIR)	130°			
	Light measurement	5-1000	lux	lux with daylight harvesting function (β-angle: ±25°),	
	Reset			Magnet	
	LEDs indicator			Blue x 1, Red x 1 (pairing, connected & etc. indications)	
	ENVIRONMENT	Ambient temperature range t _a	-20 ...+50	°C	PIR performance @35° are reduced
		Maximum case temperature t _c	60	°C	(50.000 hrs lifetime at max. Ta = 50°C / Tc = 60°C)
Max. case temp. in fault condition		110	°C		
Storage temperature range		-20 ...+70	°C		
Operating humidity		0 ... 90	%		
Storage humidity		0 ... 95	%	Not condensing	
Environmental rating		Indoor			
IP rating		IP 65		Gasket included	
Expected lifetime		50'000	h	Ta=50°C or Tc=60°C	
DIMENSIONS AND WEIGHT		Screw thread length	25	mm	
	Length	43.5	mm		
	Diameter internal	21.8	mm		
	Diameter external	28	mm		
	Protrusion	6	mm	With PIR 7.5 mm	
	Mounting hole diameter	22 – 23	mm		
	Product weight	12.5	g		
	Wire preparation length, input side	7 ... 9	mm	22...18 AWG	
	Cable cross section, input side	0.25...0.75	mm ²		
Maximum allowed cable length	10	m			
STANDRDS	CE LVD: EN61347-2-11 EMC: EN 301 489-1 EN 301 489-17 EN 50581 EN 62479 EN 300 328 DALI 2: EN IEC 62386-101, EN IEC 62386-103 and D4i Part 351 RoHS & REACH compliance UL SRRC				

Detection range

Detection Area versus Hight

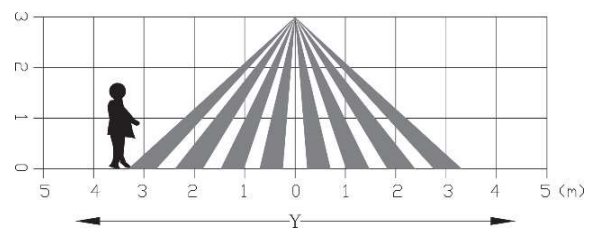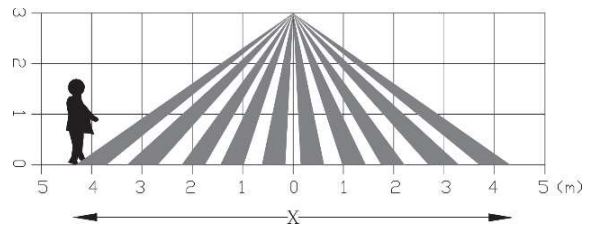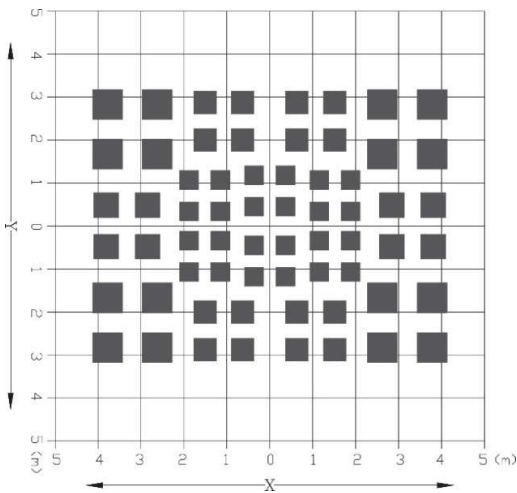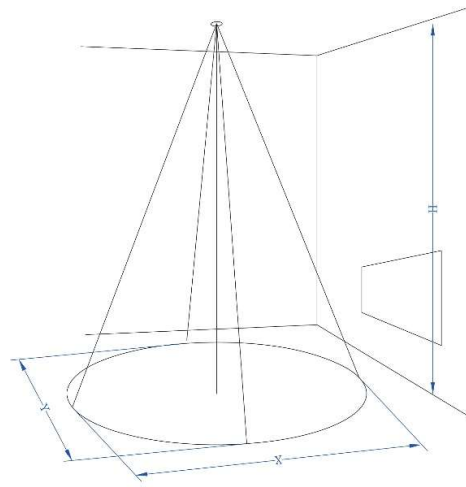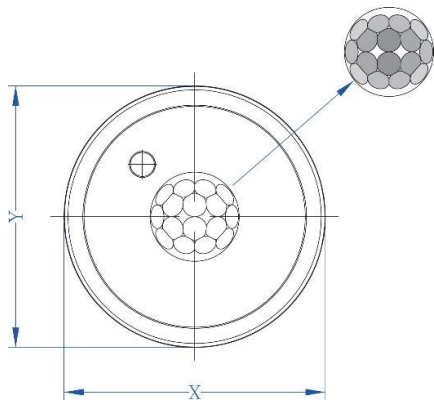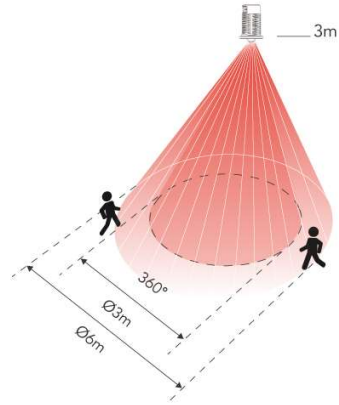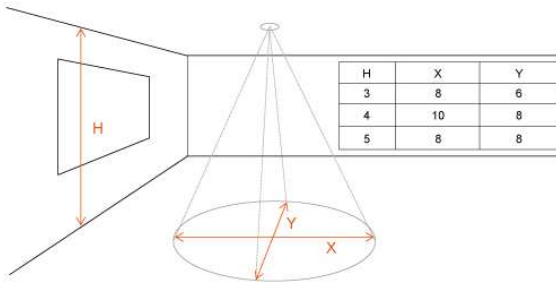

Additional product information

- By integrating the device into a casing, the wireless range could be affected by metal surfaces. Therefore, the wireless range needs to be verified after integration.
- The device could be reset to factory default by magnet (cfr User Instruction)
- The status LED of the device indicates following Network status
 - Blue LED Indicator:
 - Success connection: LED indicator flashes 2s at once
 - No connections: LED indicator flashes 0.3s at once
 - Reset to factory settings:
 - LED indicator flashes 1s at once, then quickly flashes and disappears
 - Red LED Indicator:
 - Warm up: LED indicator disappears after 60s
 - When PIR is triggered, the LED indicator quickly flashes at once; continuous triggered, LED indicator flashes every 1s at once
- The device has passed successfully the SILVAIR Testing process.
- The device can be put into operation using the HubSense Commissioning Tool (<https://platform.hubsense.eu>), subject to prior acceptance of the Terms of Use and the Privacy Policy.
- Inventronics may terminate or suspend the use of the HubSense Commissioning Tool at any time and for any or no reason in its sole discretion, even if access and use is continued to be allowed to others.
- The device complies with Bluetooth mesh Standard v1.0. It can also be used in 3rd party Bluetooth mesh network, that complies with this standard and that supports the mesh models of this device, and with certain 3rd party commissioning tools, that support the mesh models of this device. In order to ensure correct interoperability a verification with the 3rd party network components and the 3rd party commissioning tool is necessary in advance. Please contact Inventronics (support@hubsense.eu) to receive the actual list of supported models for this device.
- Inventronics shall have no liability for any 3rd party commissioning tool and does not make any representations, express or implied, about the availability and/or performance of such commissioning tool.
- Inventronics shall have no liability for and does not make any representations, express or implied, about the connectivity of Inventronics qualified Bluetooth mesh products with any other products, that have passed the SILVAIR Testing process

ordering information

Product type	EAN10
B NLC D OF LI	6977078997553

Inventronics GmbH
 Parkring 31-33, 85748 Garching,
 Germany
 Email:
contact@inventronicsglobal.com